

LFPM-200K-2CH High Speed Pulsed Optical Power Meter

High speed, accurate, and stable

The LFPM-200K-2CH from Labsphere is a high speed optical power meter designed for the continuous and pulse measurement of photodetector currents. When paired with laser power measurement sphere sensors, it provides a quick and convenient solution for testing and characterizing laser and laser-based systems. This adaptable instrument is valuable for both continuous and pulsed laser power measurement, catering to the requirements of research and development as well as production line applications.

The LFPM-200K-2CH is equipped with an impressive high-speed detection capability, allowing for sampling frequencies of up to 200 kHz from 2 separate channels. To accommodate signals at various levels, the LFPM-200K-2CH incorporates 6 gains, providing a dynamic range of at least 10^6 . The instrument utilizes a 16 bit analog-to-digital (AD) converter ensuring high-resolution data acquisition. Additionally, the LFPM-200K-2CH features an external trigger function that enables synchronized measurements with pulsed power sources, enhancing measurement precision and versatility.

The LFPM-200K-2CH comes with robust software that seamlessly controls the hardware gain, optimizing the readout for the best operational mode. This intelligent feature significantly minimizes the need for manual control and enhances measurement throughput.




The software is designed to be user-friendly and straightforward, enabling easy operation. Measurement results, including the maximum value and mean value, can be conveniently accessed from the software interface. Furthermore, the software allows for data recording and saving onto the hard disk, facilitating post-processing and analysis of the acquired data.

Features:

- Accurate and fast data acquisition (Max. 200 kHz)
- Synchronous measurement by external trigger
- High dynamic range (10^6)
- High ADC resolution (16 bits)
- Powered via USB port

User Interface

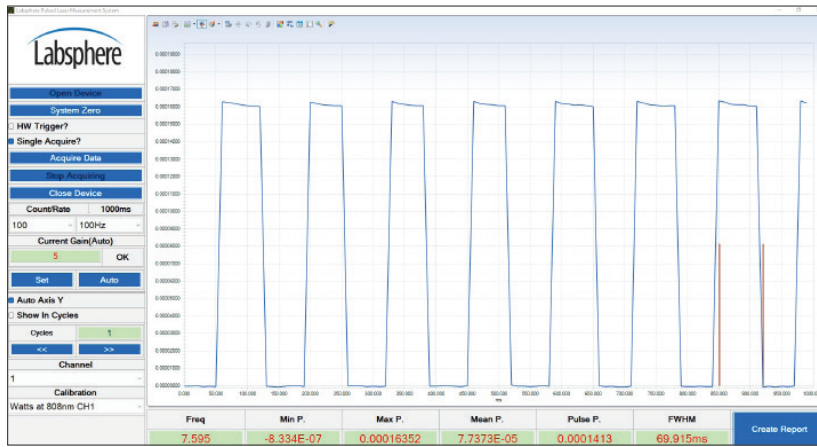

- We can provide SDK in C#/C++/LabView and a demo in Python calling C# API
- Simple one page software to set all the parameters and read results
- Text based calibration file for easier customer modification
- Dark noise subtraction by software
- Channel selectable via software
- Easy switch between software trigger and hardware trigger (10 seconds timeout)
- If you need customized software, talk to us

Ordering Information and Specifications

Model Number:	LFPM-200K-2CH
Order Number:	LAS-00129-000
Maximum Sampling Frequency:	200 kHz
Bandwidth:	max 200 kHz (Range dependent)
Gain: (V/A)	0:1 kV/A, 1:10 kV/A, 2:100 kV/A, 3:1 mV/A, 4:10 mV/A, 5:100 mV/A
Current Range:	1nA - 10mA Range Specifications:
Gain	Resolution Accuracy (%rdg ± offset) Bandwidth Hz(-3dB)
<± 100 nA	3 pA 1% ± 0.2 nA 20 kHz
± 1 µA ~ ± 100 nA	30 pA 0.5% ± 1 nA 200 kHz
± 10 µA ~ ± 1 µA	0.3 nA 0.5% ± 10 nA 200 kHz
± 100 µA ~ ± 10 µA	3 nA 0.5% ± 0.1 µA 200 kHz
± 1 mA ~ ± 100 µA	30 nA 0.5% ± 1 µA 200 kHz
± 10 mA ~ ± 1 mA	0.3 µA 0.5% ± 10 µA 200 kHz

Ranging:	Manual
Typical RMS Noise:	0.2 pA
Linearity Error:	0.5% (>1 µA); 1% (<1 µA); 3% (<100 nA)
AD Bits:	16 bit
Buffer:	Directly write to RAM
ADC Resolution:	16 bits
Significant Figures:	5
Nonlinearity:	0.5% (>1 µA); 1% (<1 µA); 3% (<100 nA)
Reading Rate: (readings /second)	DC~200 kHz
Rise Time:	3 µs (Range Dependent)
Data Recording Rate:	200 K max
Data Storage:	RAM storage dependent
Recording Interval:	200 K max
Compatible Detectors:	Silicon Photodiodes, InGaAs Photodiodes
Inputs:	2 Channels
Input Connection:	BNC Coax
Noise Correction:	Dark Correction
External Trigger:	Yes
Trigger Line:	TTL 3 to 5 V
Power:	USB, <500 mW
Power Input:	USB 2.0
Communication Interface:	USB 2.0
Operating Systems:	Windows 10, Linux (software for windows only)
User Interface:	Windows Software UI
Software:	Labsphere Pulsed Laser Power Measurement System Software
Software Part Number:	LAS-00366-001
Software Customization:	API Included
Programming:	C#, C++, LabView
Operating Environment:	10°C ~ 30°C RH<90%
Dimensions:	11.8 in (300 mm) L x 8.26 in (210 mm) W x 3.5 in (90 mm) H
Weight:	2 kg

